



1901
Exposed Sequential Shower Valve
with Diverter & Rigid Riser Kit

Product Specification

Product Code:	N2 SQSHXDIV C
Finish:	Chrome
Connection Inlet:	15mm Compression
Inlet Centres:	Adjustable from 136mm – 158mm
Maximum Temperature:	Pre-set 42oC
Pressure Range:	Min 0.3 Bar, Max 5.0 Bar

Additional Information

- Chrome plated to BS EN 248:2002
- Supplied with 2 x 8 l/min. flow regulators
- Adjustable inlet centres mean you can use existing pipework with centres measuring anything between 136mm and 158mm.
- Shower kit with external diverter, shower rose, rigid riser and rub clean handset
- Factory fitted regulators means this is a water saving shower
- Matching taps available

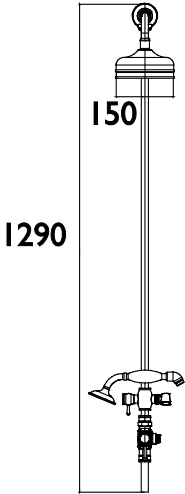

Flow Rates (litres per minute)

System Pressure	0.1bar	0.2bar	0.5bar	1bar	2bar	3bar	5bar
Through Rose, with Flow Regulators	---	---	8.7	10.7	11.2	11.4	10.1
Through Rose, without Flow Regulators	3.4	5	9.8	14.3	21	25.72	33.2
Through Handset with Flow Regulators	---	---	6.7	10	11.7	11.8	10.1
Through Handset without Flow Regulators	3	3.8	7.4	11	15.9	19.8	25.56

Technical Advice: For further information please call 0844 7016273 or email customer@bristan.com

Guarantee: 5 years covering manufacturing faults.