DUL BF C

DU LEVER Tap Range






Features:

- Metal Backnuts
- Ceramic Disc
- 3/4" valve

	Specification
Style:	Contemporary
Product Type:	Bathroom Tap
Finish/Colour:	Chrome
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Handle Type:	Lever
Connection Inlet:	3/4"BSP
Number of Tap Holes Required:	2
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valves
Plumbing System Suitability	All, Preferably Balanced
Working Pressure Range:	Min. 0.2 bar, Max. 5.0 bar
Maximum Hot Water Temperature: °c	65
Maximum Dynamic Pressure: (bar)	5
Maximum Static Pressure: (bar)	10
Flow Type:	Single
Flow Rate: (I/min @ 3 bar)	17.2
Connection Outlet:	M24 Flow Straightener
Isolation Included:	No

Dimensions (measurements in mm)

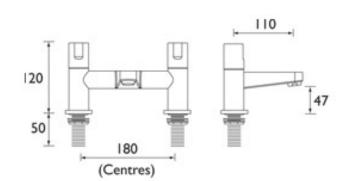

	Flow Rates (I/min)							
「「「「「「「「」」」」」「「「」」」」」」「「「」」」」」」」「「」」」」」」	System Pressure (bar)	0.2	0.5	1	2	3	5	
	DUL BF C	17.2	29.8	43.3	62.1	76	98.1	







D5

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

Product Certifications:

WRAS Certificate No: 1707002 WRAS Expiry Date: 31/07/2022



Also available from the DU LEVER Tap Range is:

同都知識同