

# TECHNICAL DATA SHEET

## 1901

### Recessed Thermostatic Dual Control Shower Valve Only

#### Product Specification

**Product Codes & Finishes:** N2 SHCVO C (Chrome)  
N2 SHCVO G (Vintage Gold)


**Product Type:** Contemporary

**Construction:** Body is of brass construction

**Supply:** Suitable for all plumbing conditions, preferably balanced.

**Inlet Connections:** 15mm Compression connections



**Working Pressures:** Min 0.2 Bar, Max 5.0 Bar

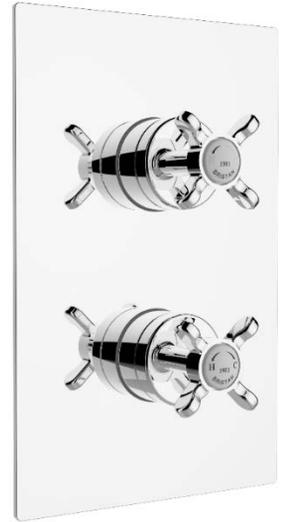

Chrome Pictured

#### Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rates at 0.2 Bar (open outlet without flow regulators) 9.0 l/min
- Fully serviceable from the front

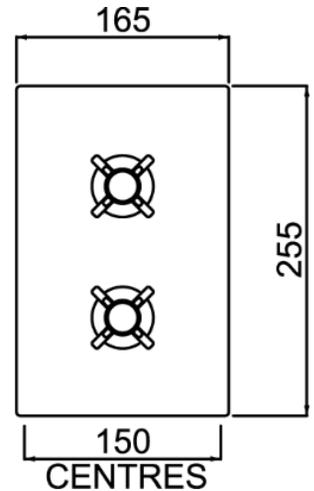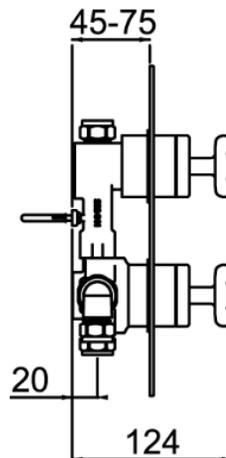

#### Flow Rates (litres per minute)


System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
Outlet 1	9.39	14.85	21	29.7	36.37	46.96

#### Compliance / Approvals

WRAS Approval No: 1409055

**Technical Advice:** For further information please call 0844 7016273 or email [customer@bristan.com](mailto:customer@bristan.com)

**Guarantee:** 5 years covering manufacturing faults.

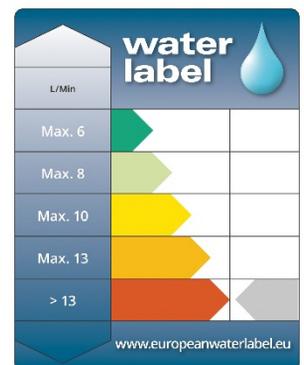

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)

