
INSTALLATION MANUAL CONCEALED CISTERN

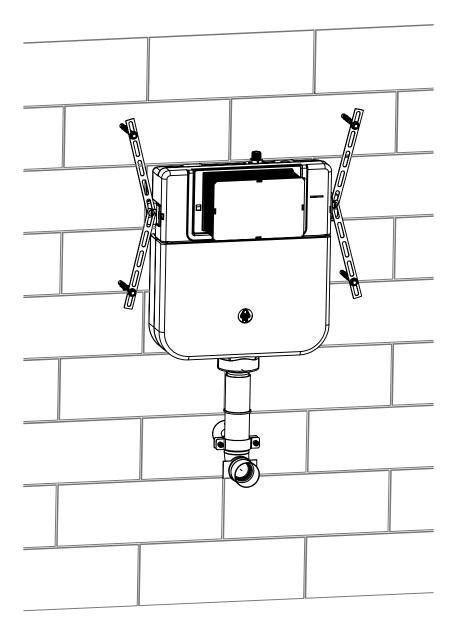

MGPAC0042

V2406 1

Parts Supplied

	1		
Ref	Description	illustration	Qty.
A	Wall Plugs	1111	4
В	Self-tapping Screw	1111	4
с	M6 Screw	40) 40)	2
D	Fixing Frame		4
E	M6 Nut	0 0	2
F	Pipe support frame assembly	ÞØ	1
G	ST6 Self-tapping Screw	111	3
Н	Ø6Wall Plugs	m	3
I	Small Anti-Plaster Plug	Ø	1
J	Flush Straight Pipe		1
к	Tunnel		1
L	Blanking Plate		1

Application scope of the product

Dual Flush

•Operating water pressure : 0.2Bar-10bar

•Adjustable flushing: 6/4 4/2.6

Tools Required (not supplied)

- •10 mm Tile Bit
- •10 mm Masonry Bit Drill
- •13 mm spanner
- •19 mm spanner
- Spirit Level
- •Tape Measure

Before You Start

• Check the pack and make sure you have all the parts listed above. If not, contact your vendor who will be able to help you.


• When you are ready to start, make sure that you have the right tools to hand, plenty of space and a clean dry area for assembly.

IMPORTATION CARE & SAFETY

• This product is only suitable for installation to solid stone / brick reinforced stud walls. Wall plugs supplied are only suitable for solidstone / brick walls.


• TakeCare using power tools- the use of residual current device(RCD) is recommended. care should be taken when drilling walls toavoid any sunken wires or pipes.


• This product can be dangerous if installed incorrectly

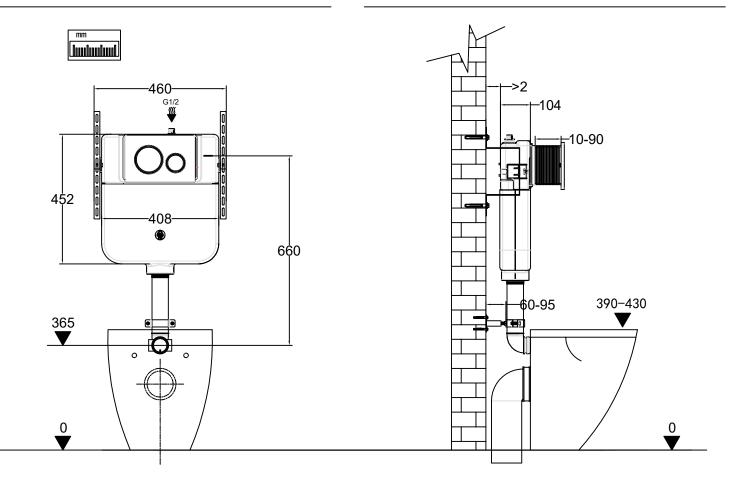



Measurements are for guidance only, Height etc. will be determined by how level the floor/wall are.

Test fit the frame to the floor and wall. Adjusting the height so the 1m marks is set to the 1m.
Mark the holes on the floor wall for the fixings

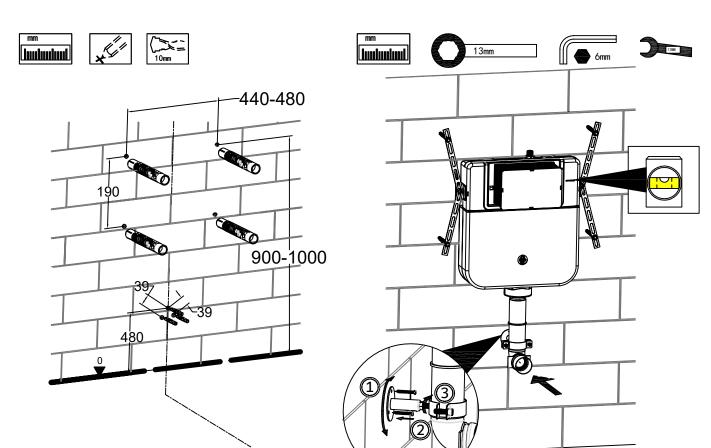

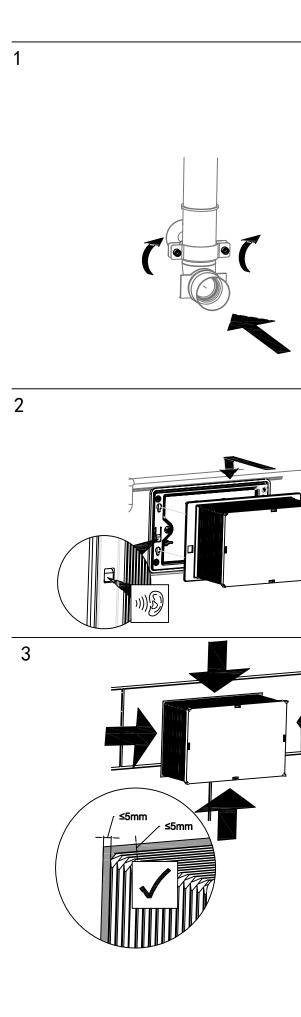

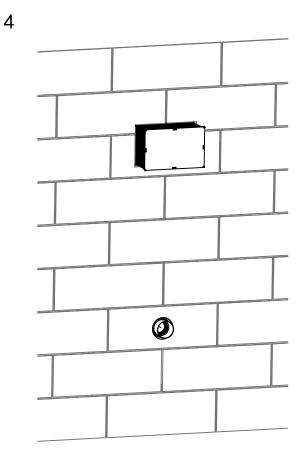

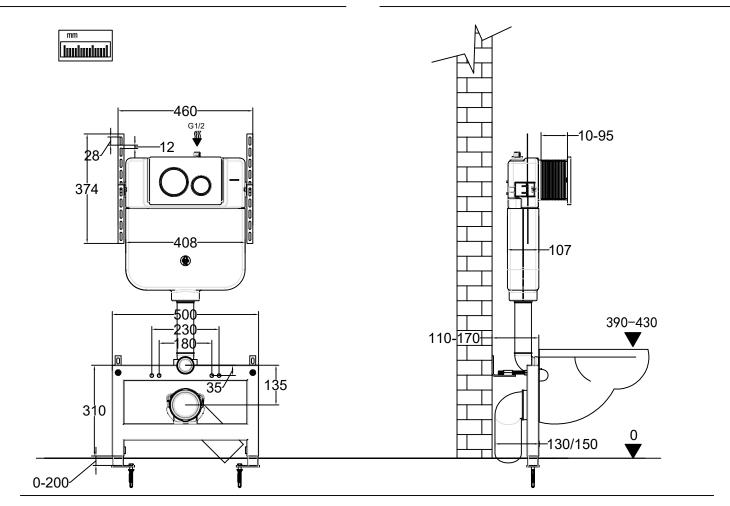



() 10mm



