## QD BSM C

## QUADRATO Tap Range

Quadrato Bath Shower Mixer Chrome



F	$\overline{}$	$\overline{}$	+ 1	4	~	٦,	~ •
т.	$\leftarrow$	а		V I	Ιŧ	-	<b>`</b>

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.75m hose, rub-clean anti-limescale handset and wall bracket
- Minimum working pressure of 0.5 bar
- 1.75m shower hose

## **Product Certifications:**




For more products, visit our website: http://www.bristan.com



Specification						
Product Type:	Bathroom Taps					
Main Construction Material:	Brass					
Mount Type:	Deck					
Handle Type:	Paddle					
Connection Inlet:	3/4" BSP					
Connection Outlet:	M28 Flow Straightener					
Number of Tap Holes:	2					
Valve/Cartridge Type:	3/4" Ceramic Disc Valves					
Plumbing System Requirements:	All, preferably balanced					
Working Pressure Range:	Min: 0.5 bar, Max: 5 bar					
Maximum Hot Water Temperature: °C	65					
Maximum Static Pressure: (bar)	10					
Flow Type:	Single					
Isolation Included:	No					

Dimensions (measurements in mm)

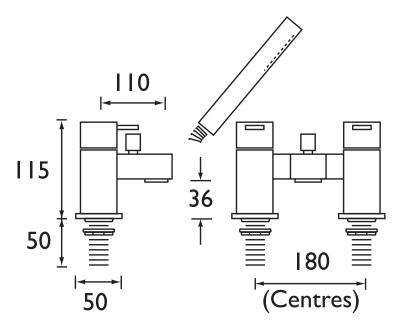

1750mm HOSE, RUB CLEAN HANDSET & WALL BRACKET

Flow Rates (I/min)									
System Pressure (bar)	0.5	1	2	3	5				
Through Handset	6.8	10.3	15.6	20	28.6				
Through Bath Filler	13.9	20.2	28.8	35.5	46.1				





